

# SX1024(52)

48 port 10GbE + 4 port 40/56GbE SDN Switch System



With industry leading density, power efficiency and low latency, the SX1024(52) is a top of rack SDN switch providing unmatched performance advantage while lowering capital and operational expenditures.

The SX1024(52), is the optimal top of rack switch with 48 port of 10GbE and 4 uplink ports of 40/56GbE upgradeable to 12 uplink ports for non blocking throughput between rack and aggregation layer. Based on Mellanox's SwitchX<sup>®</sup>-2 silicon and advanced hardware design this switch packs 48 SFP+ and 4 QSFP interfaces in an ultra dense 1U form factor. The SX1024(52) features industry leading latency and power efficiency while providing optimal performance for enterprise data center, financial services, Web 2.0, high performance computing and cloud computing applications.

SwitchX-2 carries a unique design that enables users with a straight forward platform for implementation of a Software Defined Network, allowing the construction of a high scale network with advanced fine tuning control plane capabilities. The SX1024(52) support the Virtual Protocol Interconnect (VPI) technology which enables it to be used for both Ethernet and InfiniBand technology providing the user with flexibility and investment protection. The SX1024(52) provides a full suite of management options, including support for Mellanox's NEO™, SNMP V1,2,3, and web user interfaces. In addition, the SX1024(52) incorporates a familiar industry-standard CLI, which enables administrators to easily configure the switch.

To ensure long term applicability, the SX1024(52) is provisioned to enhance its current capabilities with additional L2 and L3 features through software upgrades.

## World-Class Design

The SX1024(52) is an elegant top-of-rack design that is designed for performance, serviceability, energy savings and high-availability. SX1024(52) comes with 52 ports, its active ports are 1-48 (10GbE) and 57-60 (40 GbE), ports 59 and 60 can be broken to 4x10GbE ports each so single switch can reach as much as 56 10GbE ports. The compact 1RU design and optimal port count of 48 SFP+ and 4 QSFP ports, provide the perfect solution for a high density, server packed rack. Standard airflow scheme is supported. Redundant power supplies and fans provide high availability for both Enterprise Data Center and High Performance Computing environments. Status LEDs for fans and power supply units are placed on the front side of the system for easy status identification. Common accessories such as rack mount kit, AC power and RJ45 console cables are included with a quick-start guide as part of the standard system to ensure fast installation and a positive out-of-the-box experience.

## HIGHLIGHTS

### BENEFITS

- Optimal ToR design
- 48x10GbE hosts ports and 4x40/56GbE uplinks
- License upgradeable to 48x10GbE host ports and 12x40/56GbE uplinks
- Software Defined Networking support
- Leading performance and scalability
- Lowest latency
  - 220ns for 40GbE
  - 270ns for 10GbE
- Energy efficient
- Virtual Protocol Interconnect (VPI)
- Upgradable L3 features
- IPv6 IPsec



**End-to-End**

The SX1024(52) switch is interoperable with components supporting the Ethernet industry standards. The switch becomes an integral part of an optimized end-to-end networking solution when combined with other Mellanox Ethernet products, including the ConnectX® family of 10GbE NICs, acceleration and management software and cables. These solutions deliver industry-leading performance, scalability, reliability and power usage for optimal data center efficiency and application performance across a wide range of industry applications in financial services, Web 2.0, database, cloud and HPC environments.

Collocated compute and storage

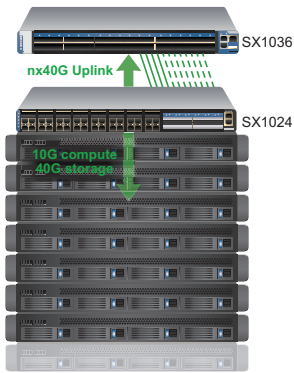


Figure 1.

Part Number	Description
MSX1024B-2BFS_A1	SwitchX®-2 based 48-port SFP+ 10GbE, 4 port QSFP 40/56GbE, 1U Ethernet switch. 2PS, Short depth, P2C airflow, Rail kit and RoHS-6
MSX1024B-2BRS_A1	SwitchX®-2 based 10GbE/40GbE, 1U Open Ethernet Switch with MLNX-OS, 48 SFP+ ports, 4 QSFP+ ports, 2 Power Supplies (AC), PPC460, short depth, C2P airflow, Rail kit, RoHS6
UPGR-1024-FULL	Enable 12 QSFP+ ports

\*P2C is connector side outlet. C2P is connector side inlet.

**FEATURES**

**LAYER 2 FEATURE SET**

- 1GbE, 10GbE, 40GbE, 56GbE
- 48K L2 Forwarding Entries
- Static MAC
- Jumbo Frames (9216 BYTES)
- VLAN 802.1Q (4K)
- 802.1W Rapid Spanning Tree Protocol
  - BPDU Filter
  - Root Guard
  - Loop Guard
  - BPDU Guard
- 802.1Q Multiple Spanning Tree Protocol
- PVRST+ (Rapid Per VLAN Spanning Tree+)
- 802.3ad Link Aggregation/LACP
  - 16 Ports/Channel
  - 64 Groups Per System
- Multi Chassis Link Aggregation Group (MLAG)
- 802.3X Flow Control
- 802.1Qbb Priority Flow Control (PFC)
- 802.1Qaz Enhanced Transmission Selection (ETS)
- DCBX
- 802.1AB LLDP
- 802.1X
- IGMP v1/v2/v3 Snooping Querier
- Access Control Lists (L2-L4)
- sFlow
- Port Mirroring

**LAYER 3 FEATURE SET**

- Static Routes v4
  - OSPFv2
  - BGPv4
  - Router Port Interface for Routing
  - VLAN Interface for Routing
  - PIM Bi-Dir
  - DHCP Relay
  - ECMP, 64-way
  - VRRP
  - IGMP v2/v3
- NETWORK MANAGEMENT**
- UFM-VPI
  - 100/1000 Management port
  - In-Band Management
  - Serial Console Port
  - SDN

- OpenFlow 1.0
- Embedded Puppet Agent
- RADIUS
- TACACS+
- LDAP
- SSHv2
- DHCP/Zeroconf
- Industry Standard CLI
- Management over IPv4/IPv6
- Telnet
- File Download via SCP, FTP & TFTP Client
- Network Time Protocol (NTP)
- Syslog
- Dual SW Image
- Auto Temperature Control
- System Alarms
- Port Counters
- Event Notification
- SNMP v1/v2/v3
- E-Mail
- Web UI
- Predefined Scheduled Scripts
- System Health Monitoring

**POWER SPECIFICATIONS**

- ATIS Weighted Power Consumption: 74.7W
- Max Power Consumption: 239W
- Input Voltage Range: 100-240VAC
- Physical/ Electrical
  - 48 10GbE SFP+ ports
  - 4 40/56GbE QSFP ports
- Two field replaceable Power supply units
- Two field replaceable fan units

**PHYSICAL CHARACTERISTICS**

- Dimensions: 1.72”H x 16.85”W x 15.9”D
- Weight: 17.0 Lbs (7.75 Kgs)

**SUPPORTED MODULES AND CABLES**

- QSFP, SFP+ short and long range optics
- QSA - QSFP to SFP+ adapter
- QSFP to SFP+ DAC cable
- QSFP to QSFP DAC Cable
- QSFP breakout cables 40GbE to 4x10GbE
  - DAC, Optical
- QSFP AOC



350 Oakmead Parkway, Suite 100, Sunnyvale, CA 94085  
 Tel: 408-970-3400 • Fax: 408-970-3403  
[www.mellanox.com](http://www.mellanox.com)