



ConnectX[®]-3 EN

Dual Port 10 and 40 Gigabit Ethernet Adapters with PCI Express 3.0 for Dell[®] Servers

Mellanox ConnectX-3 EN 10 and 40 Gigabit Ethernet Network Interface Cards (NIC) with PCI Express 3.0 deliver high-bandwidth and industry-leading Ethernet connectivity for performance-driven server and storage applications in Enterprise Data Centers, High-Performance Computing, and Embedded environments.

Clustered databases, web infrastructure, and high frequency trading are just a few applications that will achieve significant throughput and latency improvements resulting in faster access, real-time response and more users per server. ConnectX-3 Ethernet Adapter improves network performance by increasing available bandwidth while decreasing the associated transport load on the CPU especially in virtualized server environments.

World-Class Ethernet Performance

RDMA over Converged Ethernet – Utilizing RoCE technology Mellanox Ethernet Adapters provide efficient RDMA services, deliver high performance and bandwidth to latency sensitive applications. With link-level interoperability within Ethernet infrastructures Network Administrators can leverage existing data center fabric management solutions.

Sockets Acceleration – Applications utilizing TCP/UDP/IP transport can achieve industry-leading throughput over 10/40GbE. The hardware-based stateless offload and flow steering engines in Mellanox Ethernet Adapters reduce the CPU overhead of IP packet transport, freeing more processor cycles required for the application.

I/O Virtualization - Mellanox Ethernet Adapters provide dedicated adapter resources that guarantee isolation and protection for virtual machines (VM) within the server. By enabling a single NIC to appear as multiple virtual NIC's


Mellanox Ethernet Adapters give data center managers better server utilization for LAN and SAN unification while reducing capital expenditures, power and cable complexity.

Overlay Networks – New large-scale cloud environments require the implementation of overlay network protocols to overcome the issues of security, isolation and VLAN limitations within the cloud. Mellanox Ethernet Adapters bring a unique value to cloud providers by enabling them to reduce their CPU overhead and consequently reduce their OPEX and CAPEX by supporting more cloud tenants over the same infrastructure.

Software Support

All Mellanox Ethernet Adapters are supported by a full suite of software drivers for Microsoft Windows, Linux distributions, VMware and Citrix XenServer. Stateless offload which is fully interoperable with standard TCP/UDP/IP stacks are supported within the adapters. Various management interfaces and a rich set of configuration and management tools are supported across multiple operating systems.

ConnectX[®]-3

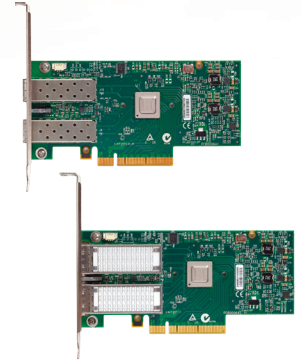

HIGHLIGHTS

BENEFITS

- 10 or 40Gb/s connectivity for servers and storage
- Industry-leading throughput and latency performance
- I/O consolidation (single unified wire for networking, storage and clustering)
- Supports industry-standard SR-IO Virtualization technology and delivers VM protection to all levels of QoS for applications
- Software compatible with standard TCP/UDP/IP stacks

KEY FEATURES

- Dual 10 Gigabit Ethernet ports
- PCI Express 3.0 (up to 8GT/s)
- Low Latency RDMA over Converged Ethernet (RoCE)
- Hardware stateless offload for TCP/UDP/IP
- Traffic steering across multiple cores
- Single Root IOV
- Intelligent interrupt coalescence
- VMware NetQueue support

FEATURE SUMMARY

ETHERNET

- IEEE 802.3ae 10 Gigabit Ethernet
- IEEE 802.3ba 40 Gigabit Ethernet
- IEEE 802.3ad Link Aggregation and Failover
- IEEE 802.1Q, .1p VLAN tags and priority
- IEEE 802.1Qau Congestion Notification
- IEEE P802.1Qbb D1.0 Priority-based Flow Control
- Multicast
- Jumbo frame support (10KB)
- 128 MAC/VLAN addresses per port

ADDITIONAL CPU OFFLOADS

- RDMA over Converged Ethernet (RoCE)
- TCP/UDP/IP stateless offload
- Intelligent interrupt coalescence

TCP/UDP/IP STATELESS OFFLOAD

- TCP/UDP/IP checksum offload (CSO)
- TCP Large Send (< 64KB) or Giant Send (64KB-16MB) Offload for segmentation (LSO)
- Receive Side Scaling (RSS) up to 32 queues
- Line rate packet filtering

HARDWARE-BASED I/O VIRTUALIZATION

- Single Root IOV
- Address translation and protection
- Dedicated adapter resources
- Multiple queues per virtual machine
- VMware NetQueue support

COMPATIBILITY

PCI EXPRESS INTERFACE

- PCIe Base 3.0 compliant, 1.1 and 2.0 compatible
- 2.5, 5.0, or 8.0GT/s link rate x8
- Fits x8 or x16 slots
- Support for MSI/MSI-X mechanisms

CONNECTIVITY

- Interoperable with 10/40GbE switches
- QSFP or SFP+ connectors
- Passive copper cable
- Powered connectors for optical and active cable support
- QSFP to SFP+ connectivity through QSA module

MANAGEMENT AND TOOLS

- Open Manage, iDRAC, Lifecycle Controller
- Configuration and diagnostic

OPERATING SYSTEMS/DISTRIBUTIONS

- Windows 2008 SP2 and 2008 R2, Windows 2012 and 2012 R2 (vNext)
- Linux Distributions (visit www.dell.com for approved Linux Distributions)
- SLES11 SP2 / SP3, VMWare ESX/ESXi 5.5
- XenServer 6.1 / 6.2

Mellanox Dell Contacts:

Rob MacDonald
OEM Sales Mgr.
Tel: +(44) 7788-967621
robm@mellanox.com

Ronnie Payne
OEM Business Development Mgr.
Tel: (512) 201-3030
ronniep@mellanox.com

General Inquiry:

DellSales@mellanox.com



The information contained in this document, including all instructions, cautions, and regulatory approvals and certifications, is provided by Mellanox and has not been independently verified or tested by Dell. Dell cannot be responsible for damage caused as a result of either following or failing to follow these instructions. All statements or claims regarding the properties, capabilities, speeds or qualifications of the part referenced in this document are made by Mellanox and not by Dell. Dell specifically disclaims knowledge of the accuracy, completeness or substantiation for any such statements. All questions or comments relating to such statements or claims should be directed to Mellanox. Visit www.dell.com for more information. Dell is a registered trademark of Dell Inc.



350 Oakmead Parkway, Suite 100, Sunnyvale, CA 94085
Tel: 408-970-3400 • Fax: 408-970-3403
www.mellanox.com